




Kicker Springs / Spring Pins

Typical Applications

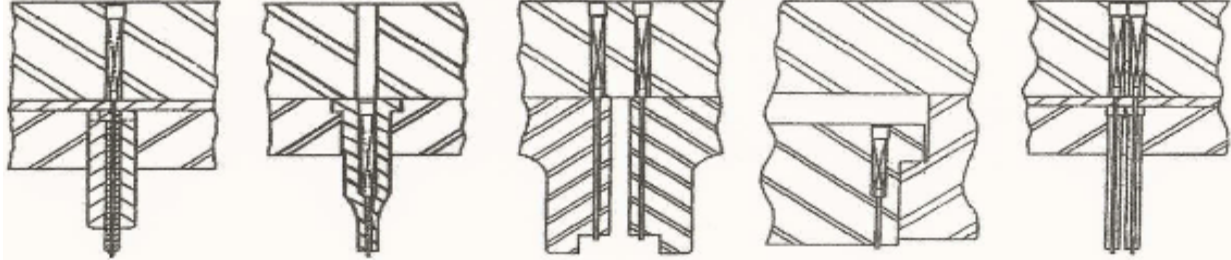

NARROW
PUNCH IN
SPLIT QUILL

COMMON
PIERCE PUNCH

HEELED
NOTCHING
PUNCHES

KNOCK-OUT IN
COMPOUND DIE

CLOSELY SPACED
QUILL PUNCHES

Standard Sizes

UNIT NO.	PIN	PIN HOLE	SPRING	SPRING HOLE	SCREW
KP-20	.020 Dia x 3"	.025	.082 Dia.x 2	.086	3 - 48 x 3/16
KP-26	.026 Dia x 3"	.031	.105 Dia.x 2 1/4	.109	5 - 40 x 3/16
KP-41	.041 Dia x 3"	.046	.140 Dia.x 2 1/2	.144	8 - 32 x 3/16
KP-55	.055 Dia x 4"	.062	.162 Dia.x 2 3/4	.166	10 - 32 x 3/16
KP-86	.086 Dia x 4"	.094	.217 Dia.x 3	.221	1/4 - 28 x 1/4
KP-148	.148 Dia x 4"	.156	.308 Dia.x 3 1/2	.312	3/8 - 16 x 5/16

UNIT CONSISTS OF SPRING-PIN AND SET SCREW

Metric Sizes

UNIT NO.	PIN	PIN HOLE	SPRING	SPRING HOLE	SCREW
KPM-508	0.50 Dia x 76.2	0.65	1.95 Dia.x 57mm	2.05	m2.5 x 5mm
KPM-660	0.65 Dia x 76.2	0.80	2.40 Dia.x 57mm	2.50	m3 x 5mm
KPM-1040	1.00 Dia x 76.2	1.20	3.20 Dia.x 59mm	3.30	m4 x 5mm
KPM-1400	1.40 Dia x 101.6	1.60	4.10 Dia.x 70mm	4.20	m5 x 5mm
KPM-2180	2.20 Dia x 101.6	2.40	4.90 Dia.x 76mm	5.00	m6 x 6mm
KPM-3760	3.75 Dia x 101.6	4.00	8.40 Dia.x 89mm	8.50	m10 x 8mm

DieSupplies.com

Div. of Clark and Osborne, LLP
6617 Ferguson Avenue
Indianapolis, IN 46220

Phone : (317) 255-5668

Phone: (800) 752-5817

Fax: (317) 253-4486

Customer Service: sales@clarkandosborne.com